



Thank you for choosing StarLine M17/M15 GLONASS/GPS.

Read these instructions carefully before installation

You can learn more about StarLine M17/M15 GLONASS/GPS at www.mayak.mobi www.starline-online.ru


StarLine wishes you a safe and pleasant journey!

1

StarLine M17 / M15

StarLine M17 only

StarLine®











StarLine

WARRANTY CARD







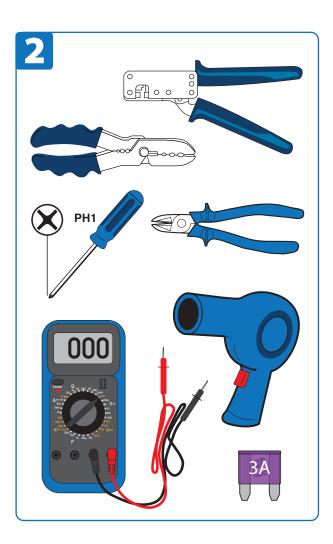




1	SCHWARZ	BLACK	NOIR	ZWART	SORT	SVART	SVART	MUSTA	NERO
	NEGRO	PRETO	MAÏPỢ	âERNÁ	CZARNY	SIYAH	FEKETE	CRNO	ЧЕРНО
	NEGRU	ЧЕРНЫЙ	JUODA	MELNS	MUST	âRNA	âIERNÁ		
2	ROT	RED	ROUGE	ROOD	RØD	RØD	RÖD	PUNAINEN	ROSSO
	ROJO	VERMELHO	KOKKINÓ	âERVENÁ	CZERWONY	KIRMIZI	PIROS	CRVENO	ЧЕРВЕНО
	ROSU	КРАСНЫЙ	RAUDONA	SARKANS	PUNANE	RDEâA	âERVENÁ		
Г	BLAU	DARK BLUE	BLEU	DONKERBLAUW	BLÅ	BLÅ	BLÅ	UMMANSININEN	BLU
3	AZUL MARINO	AZUL MARINHO	MPLE	MODRÁ	RANATOWY	KOYU MAVI	KÉK	PLAV0	СИНЬО ТЪМНО
	ALBASTRU	СИНИЙ	Mñlyna	ZILS	SININE	PLAVA	MODRÁ		
4	GRÜN	GREEN	VERT	GROEN	GRØN	GRØNN	GRÖN	VIHREÄ	VERDE
	VERDE	VERDE	PRASINO	ZELENÁ	ZIELONY	YESIL	ZöLD	ZELENO	ЗЕЛЕНО
	VERDE	ЗЕЛЕНЫЙ	ÎALIA	ZAπ·	ROHELINE	ZELENA	ZELENÁ		













We recommend you to change the default password to avoid the device control by unauthorized persons. The factory default password: 1234.



where last 4 numbers are a new password

Receive new password confirmation

New password: 5678




10 ENABLING MONITORING


Further information is related only to M17.


For real-time vehicle monitoring, register the device at **www.starline-online.ru**





Find more information on configuring StarLine M15/M17 at www.mayak.mobi

















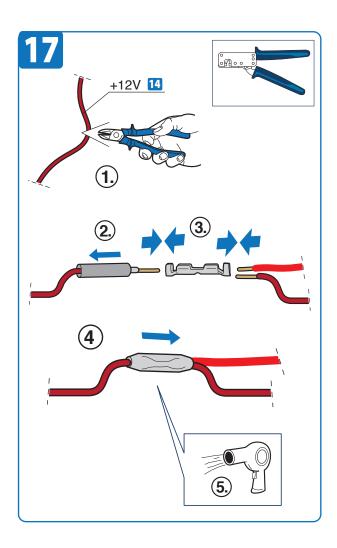













The device must be installed with the label facing up so that the internal antennas have access to RF signals. Do not place the device directly underneath a metal panel or a metal covering as this will affect GPS and GSM performance.





SPECIFICATION

Parameter	Value				
Communication standard	GSM 900/1800				
Embodiment of GSM and GPS antennas	built-in				
Model of the GPS/GLONASS receiver	MTK3333				
Supported GNSS	GLONASS/GPS				
ccuracy of calculation of the GPS/GLONASS coordinates					
typically	from 5 to 10 meters				
in conditions of the weak-signal reception	up to 500 meters				
Accuracy of location determination by the LBS GSM technology					
in the town	from 100 to 800 meters				
out of the town	from 0.5 to 30 km				
Battery	2 x CR123A Primary Lithium Batteries				
Capacity of the CR123A plug-in lithium batteries	2 x 1.5 A-h				
Battery life	up to 2 years				
Maximum load current	200 mA				
Operating voltage for external power supply (M17 only)	from 8 to 33 V				
Operating temperature range	from -40 to +60°C				
Physical dimensions	85 x 52 x 23 mm				
Weight	110 g				

StarLine®

www.alarmstarline.com www.starline-online.ru www.mayak.mobi

e-mail: info@starline.ru